



Bilge clearance in tight areas

Centrifugal submersible & inline pump

- Powerful 7 igpm @ 14psi
 Diesel, fresh and sea
- water pumping.
- Rapid diesel refueling & transfer with no spillage.
 Water transfer/clearance. Deck showers. Deck/anchor wash.



· Bilge clearance in tight areas

• Intermittently rated. Should not be run for more than 20 minutes & rested for equal time. Should not be run dry for long periods.



Centrifugal submersible & inline pump

- Strong 4 igpm @ 14psi
 Diesel, fresh and sea water pumping.
 Water systems to 80°C.
- Submersible or gravity feed.
- Fast diesel refueling & transfer with no spillage.
- · Water transfer/clearance. Deck showers. Deck/anchor wash.

· Continuously rated. Should not be run dry for long periods.

- · Bilge clearance in tight areas
- · Continuously rated. Should not be run dry for long periods.



Centrifugal inline pump

Centrifugal submersible

Pumps 2.8igpm @ 14psi

• Water systems to 60°C.

Submersible/gravity feed.

· Water transfer. Deck show-

• Fresh and sea water.

ers. Deck/anchor wash.

& inline pump

- Strong 4 igpm @ 15psi
- Fresh water.
- Single and multi-outlet
- water systems to 80°C.
- Gravity feed, manual prime, pressure switch or electric tap activated.

• Continuously rated. Should not be run dry for long periods.




Centrifugal submersible & inline pump

- Pumps 2.8 igpm @ 11psi
- Diesel, fresh and sea
- water pumping.
 - Bait tank aeration, diesel

transfer/refuelling. Water transfer.

- Water systems to 80°C. Submersible or gravity feed.
- · Continuously rated. Should not be run dry for long periods.

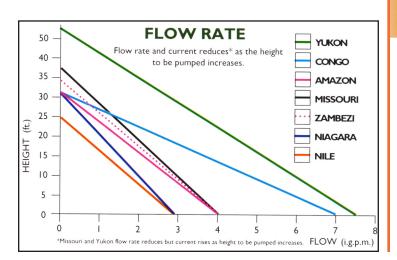



Flexible impeller selfpriming inline pumps

Yukon:

- Strong 4 igpm @ 16psi
- Reversible flow.
- Self-priming to 2.5 meters.

Missouri:

- Strong 4 igpm @ 16psi
- Reversible flow.
- Self-priming to 2 meters.

Both:

- Diesel, fresh & sea water, 4°C to 60°C.
- Diesel refuelling/transfer.
- Bilge clearance in tight areas.

• Continuously rated. Dry running of more than 30 secs. will seriously damage the impeller (which however, is quickly replaceable).

Pump Specification	Congo	Amazon	Nile	Niagara	Zambezi	Missouri	Yukon
LVM (12 Volts)	111	105	107	4	160	165	176
LVM (24 Volts)	112	117	118	-	162	166	177
Flow (igpm)	7	4	2.8	2.8	4	4	7.5
Pressure (psi)	14	14	11	14	15	16	23
Amps 12 Volts	6	4.5	2.5	2.8	4.5	6-9*	12-18*
Diameter (ins.)	1.5	1.5	1.5	1.4	2.1	2.8	5
Length (ins.)	6.5	6.5	5.6	5.1	4.9	6.1	7.5
Weight (lbs.)	1.1	1.1	0.5	0.25	1.1	3.3	6.8
Cable Length (m)	4	4	I	I	1	0.28	0.5
Outlets	3/4" i.d. hose	I/2" i.d. hose	I/2" i.d. hose	3/8" & 1/2" i.d. hose	1/2" i.d. hose	3/8" BSP & I" i.d. hose	I/2" BSP & I" i.d. hose
Туре	Centrifugal submersible and inline	Centrifugal submersible and inline	Centrifugal submersible and inline	Centrifugal submersible and inline	Centrifugal inline	Flexible impeller self priming inline to 2 metres	Flexible impeller self priming inline to 2.5 metres
Liquids	Fresh & sea water Diesel	Fresh & sea water Diesel	Fresh & sea water Diesel	Fresh & sea water	Fresh water	Fresh & sea water Diesel	Fresh & sea water Diesel
Rating	Continuous	Continuous	Continuous	Intermittent	Continuous	Continuous	Continuous

* At Maximum Lift, Minimum Flow.

PORTABLE PUMPING KITS

LVM offer a range of Portable Pumping Kits which include pumps, hoses and spray nozzles. They have a multitude of uses:

- Wash down for boat, car or caravan/RV.
- · Cool off/shower.
- Container filling/emptying.
- Drinking water.
- Anchor wash down.
- Spraying garden/watering.
- Bilge/storm water clearance.
- Diesel refuelling (Amazon & Congo only).

Choosing the Right (✔) Pumping Kit:-

How they compare	Congo	Amazon	Niagara
Pumps fresh/sea water	~	~	~
Pumps Diesel	~	 ✓ 	
Adjustable on/off spray nozzle	~	 ✓ 	~
4 metre cable & battery clips	~	~	~
4 metre layflat pvc/nitrile hose	~	~	
3 metre layflat food quality hose			~
Over 25 Years Rating continuous	~	 ✓ 	
Rating intermittent			~
Available 12 volts	(LVM174)	(LVM130)	(LVM139)
of Exceller Available 24 volts	(LVM175)	(LVMI3I)	



LVM Pumping Products Available Internationally From: ABS Alaskan, Inc. Alaska Battery Mfg.

2130 Van Horn Rd. Fairbanks, AK 99701 ph: 1-907-452-2002 fax: 1-907-451-1949 toll free: 1-800-478-7145 (within Alaska) email: abs@absAK.com 166 E. Potter Dr. #2, Anchorage, AK 99518 ph: 1-907-562-4949 fax: 1-907-563-4900 toll free: 1-800-562-4523 (within Alaska) email: abm@absAK.com

U.S. toll free: 1-800-235-0689 (contiguous 48 states & Hawaii) Or shop online at: www.absAK.com